


GENERAL NOTES:
FILLETS: R .05
UNLESS OTHERWISE
NOTED

PARTS LIST

ITEM	QTY.	PART NAME	MATERIAL	DESCRIPTION
1	2	SIDE PLATE	SAE1020	.12 UNIFORM THICKNESS
2	6	RIVET	STANDARD	Ø.31 RIVETS
3	1	WHEEL HUB	SAE1020	
4	1	BUSHING	BRONZE	OILLESS BUSHING
5	2	WASHER	STANDARD	ID: Ø1.00, OD: Ø2.12, .18 THICK
6	1	AXLE	SAE1020	
7	1	WHEEL LOCK	SAE1020	
8	1	SPRING PIN	STANDARD	Ø.25 SPRING PIN
9	1	WHEEL	HARD RUBBER	

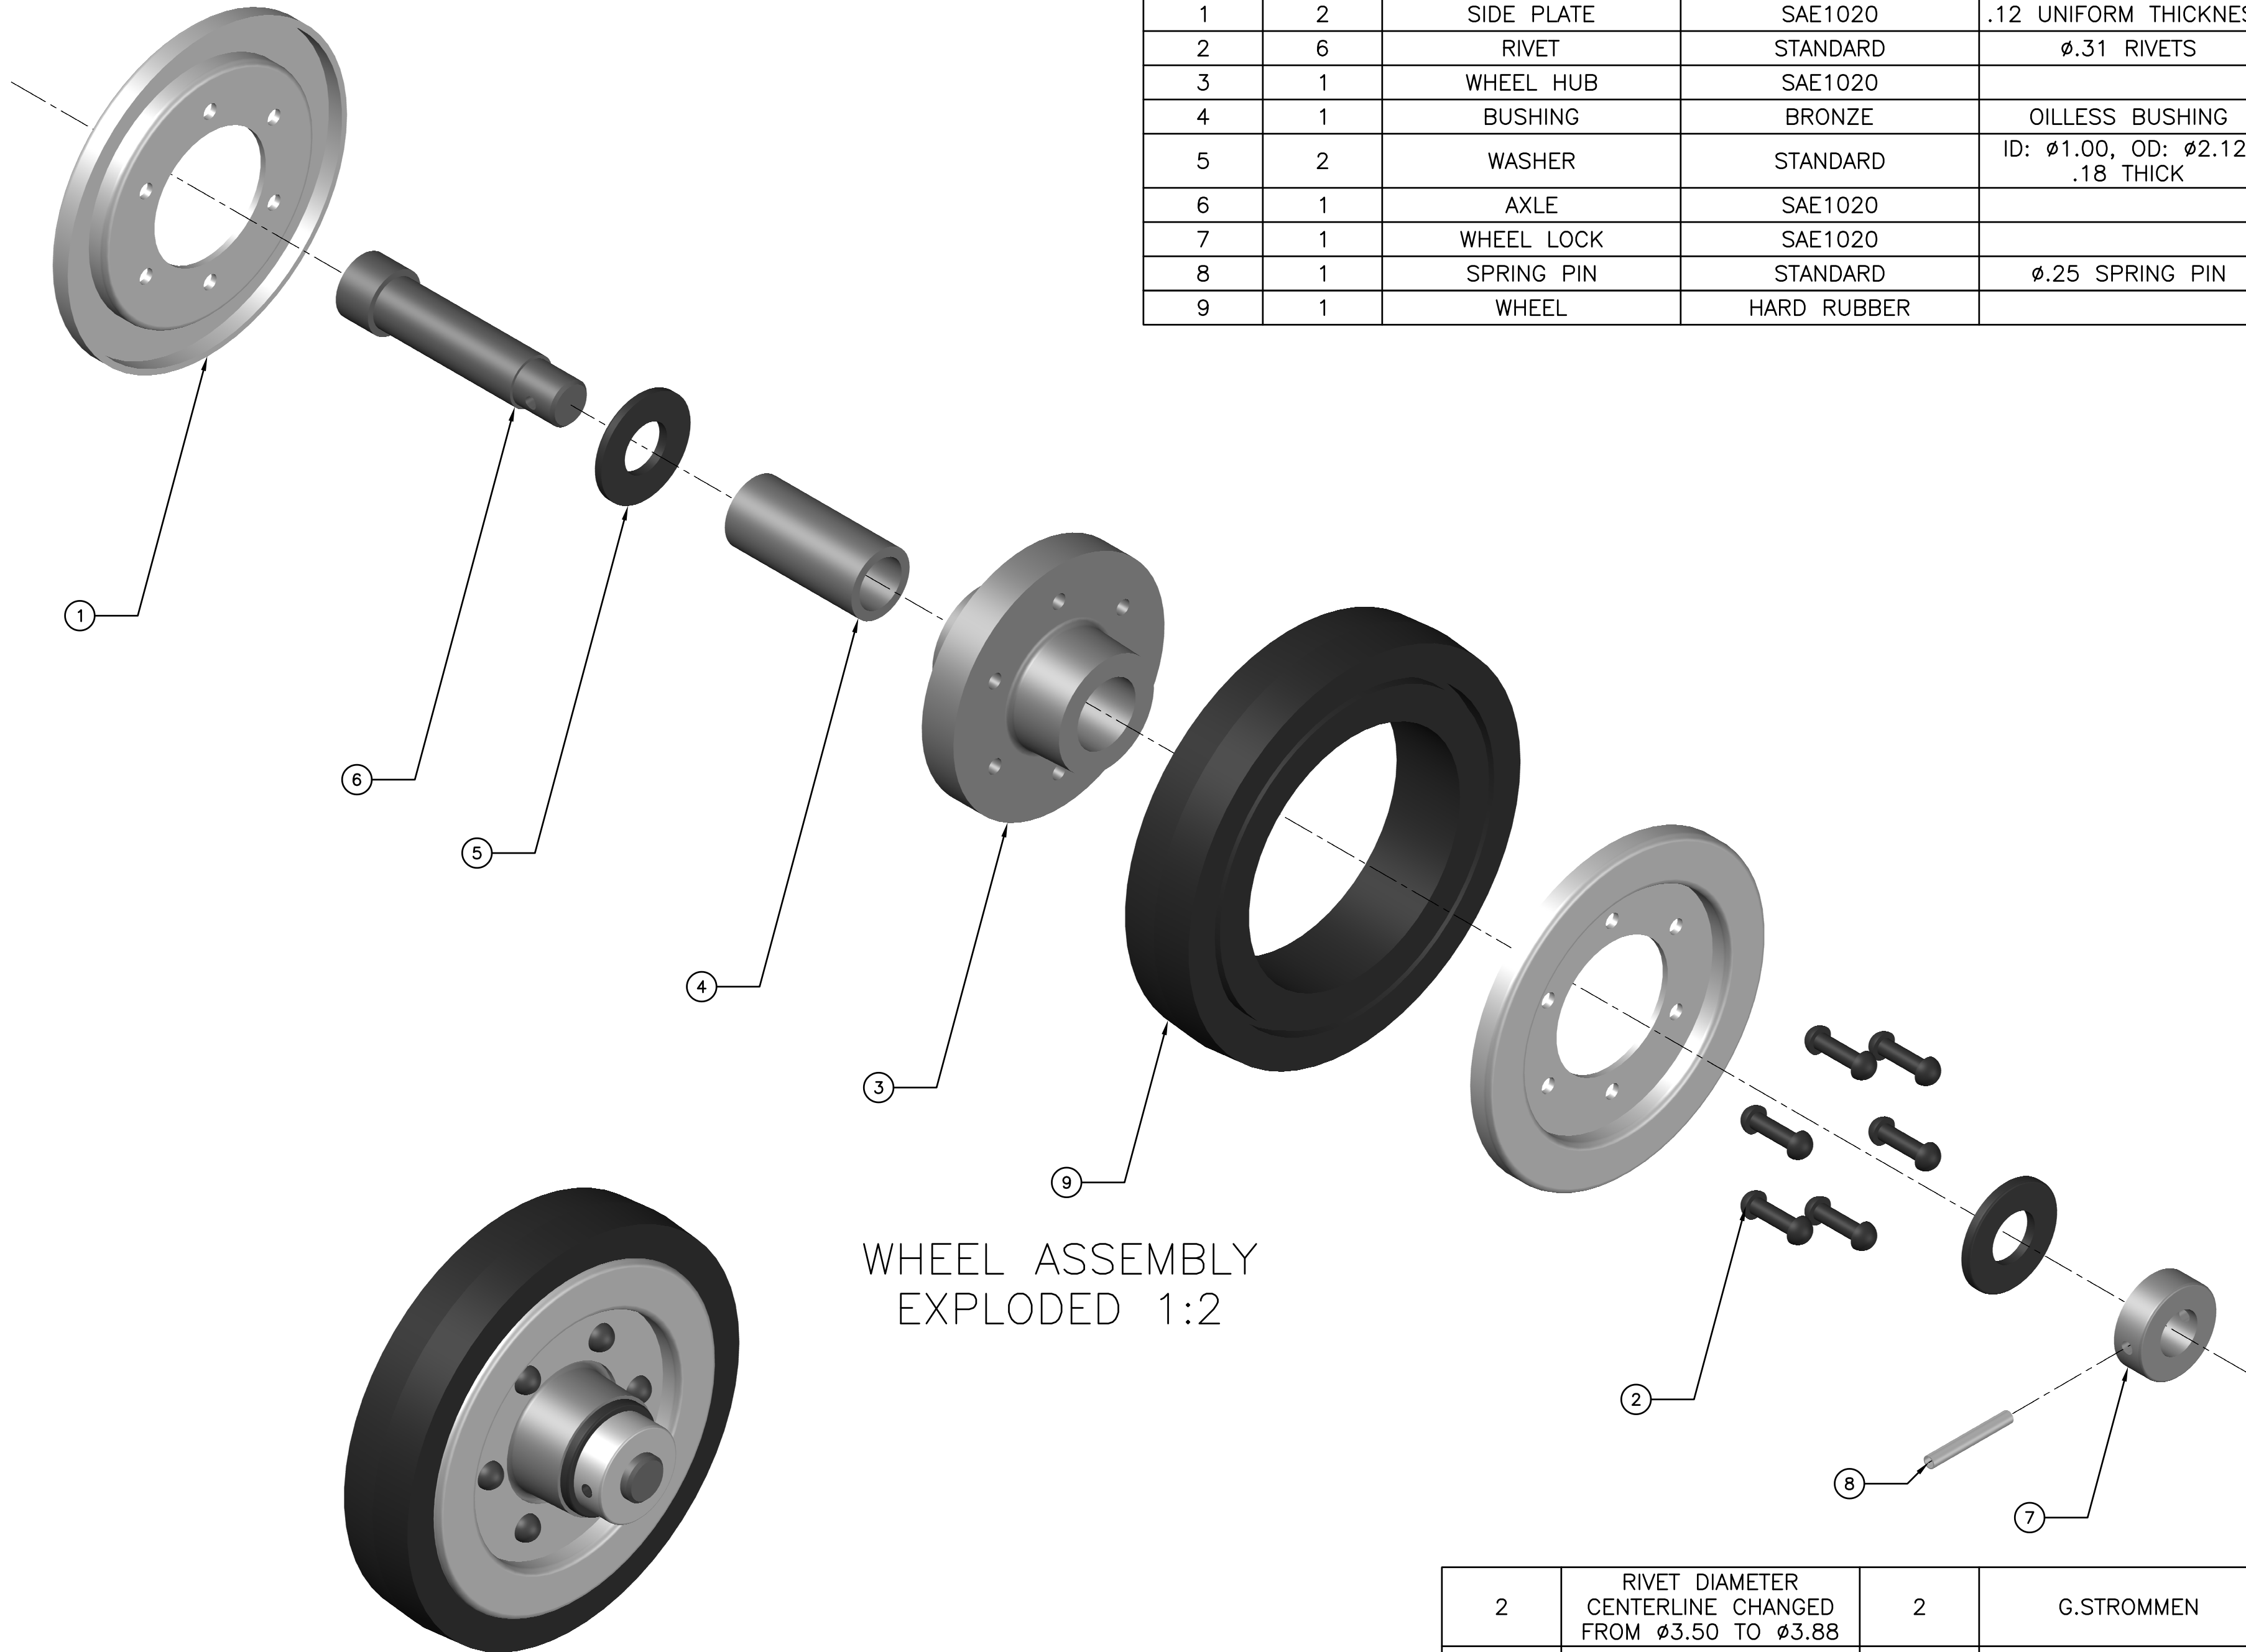


WHEEL ASSEMBLY
EXPLODED 1:2

WHEEL ASSEMBLY
SCALE 1:2

LEGEND:
° DEGREES
Ø DIAMETER
R RADIUS

BRYAN LOPEZ
GRAPHIC DESIGNER
GRAPHICALCREATIVEDESIGN@GMAIL.COM



TOLERANCES UNLESS SPECIFIED:
DECIMAL INCHES:
X = ±.020
XX = ±.010
XXX = ±.005
FRACTIONAL ±1/64"
ANGLES ±1 DEGREE
SURFACES 32/

COURSE: DDGT 121

AUTOCAD DRAWING NAME:
WHEEL

FIG #: 11-55

DRAFTER: B. LOPEZ


DATE: 2/10/19

SCALE: AS NOTED

PAGE #: 1 OF 2

REVISION	DISCRPTION	PAGE	APPROVED BY
2	RIVET DIAMETER CENTERLINE CHANGED FROM Ø3.50 TO Ø3.88	2	G.STROMMEN
1	TAPER ANGLE CHANGED FROM 5.0° TO 3.5°	2	G.STROMMEN

REVISIONS

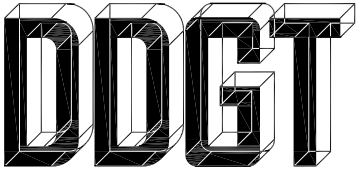


DIGITAL DESIGN
GRAPHICS
TECHNOLOGY

WWW.DDGT.NET

GENERAL NOTES:
FILLETS: R .05
UNLESS OTHERWISE
NOTED



PARTS LIST

ITEM	QTY.	PART NAME
1	2	SIDE PLATE
2	6	RIVET
3	1	WHEEL HUB
4	1	BUSHING
5	2	WASHER
6	1	AXLE
7	1	WHEEL LOCK
8	1	WHEEL
9	1	SPRING PIN

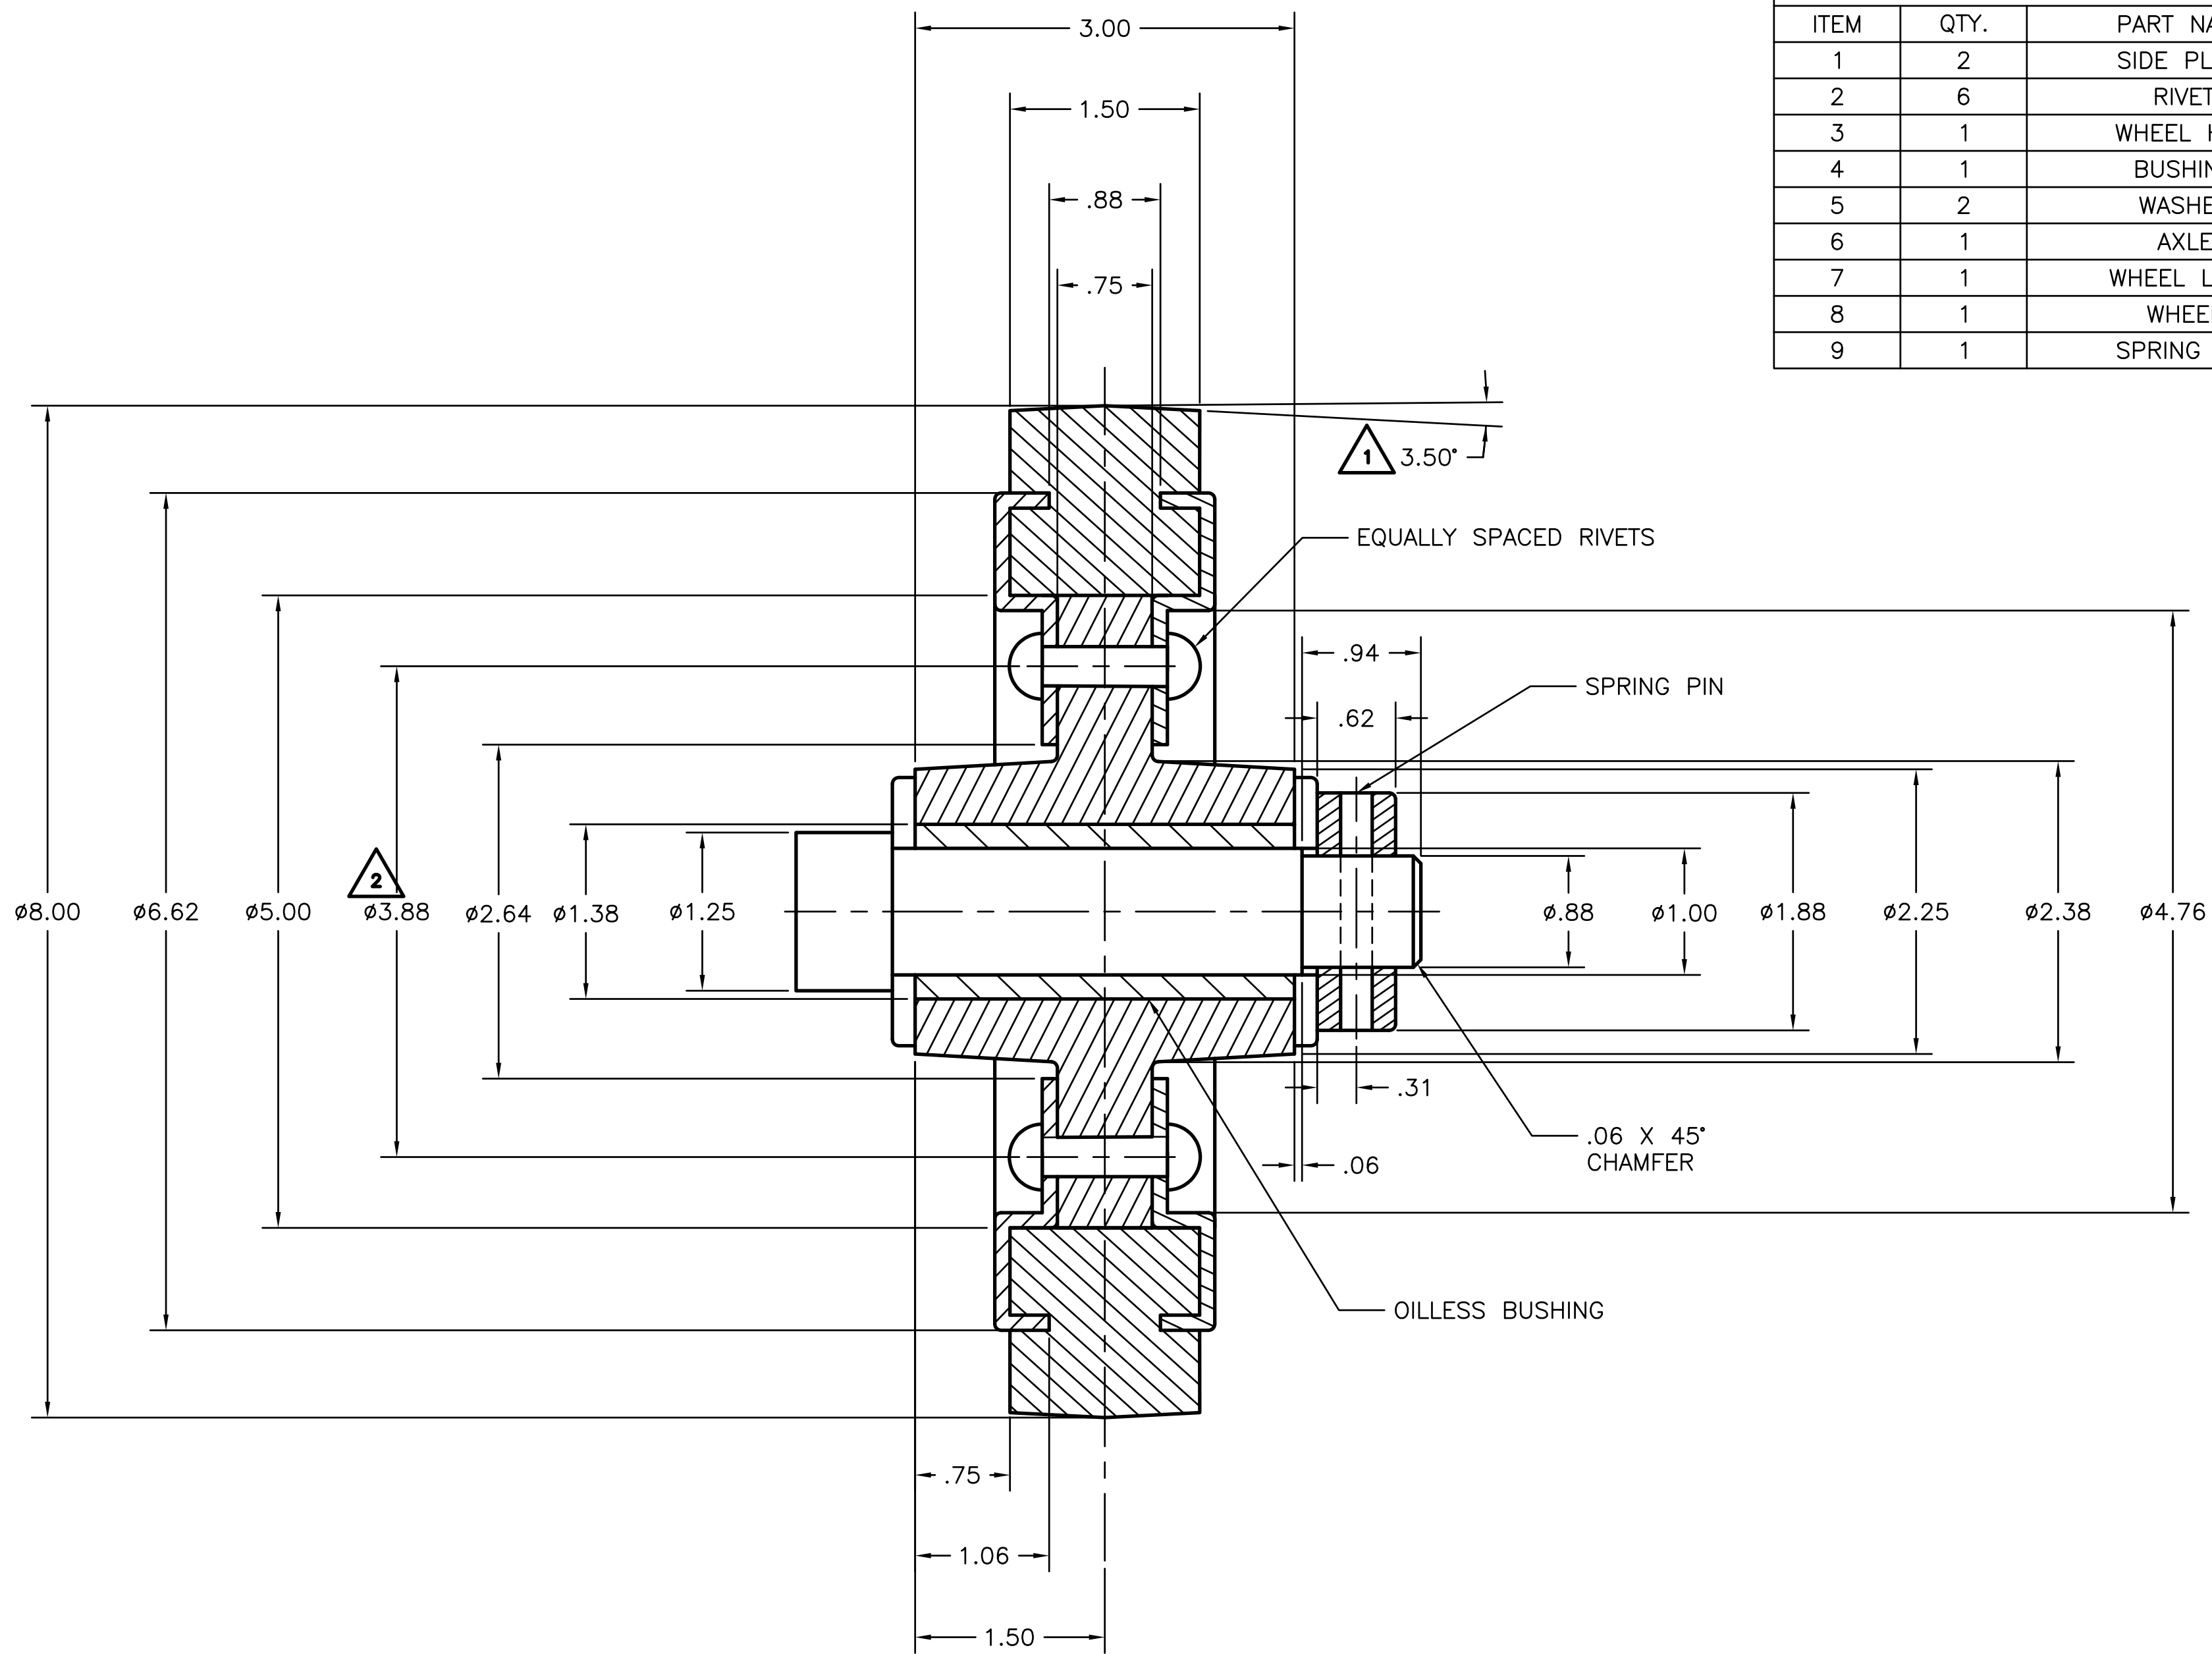

LEGEND:

- ° DEGREES
- ø DIAMETER
- R RADIUS

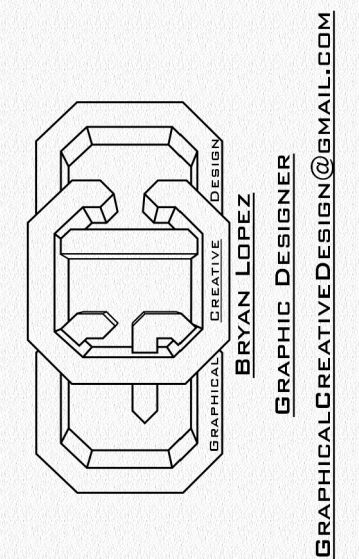

TOLERANCES UNLESS SPECIFIED:
 DECIMAL INCHES:
 X = ±.020
 XX = ±.010
 XXX = ±.005
 FRACTIONAL ±1/64"
 ANGLES ±1 DEGREE
 SURFACES 32/

COURSE: DDGT 121

AUTOCAD DRAWING NAME:
WHEEL

FIG #: 11-55

DRAFTER: B. LOPEZ

DATE: 2/10/19

SCALE: 1:1

PAGE #: 2 OF 2

REVISION	DISCRIPTION	PAGE	APPROVED BY
2	RIVET DIAMETER CENTERLINE CHANGED FROM ø3.50 TO ø3.88	2	G.STROMMEN
1	TAPER ANGLE CHANGED FROM 5.0° TO 3.5°	2	G.STROMMEN

REVISIONS